


SPK	DESCRIPTION	CALL	DATE

All dimensioned features inspected and highlighted
 - conforming features highlighted in green
 - non-conforming features highlighted in red

Non-conforming features bubbled and on Inspection Record



ORIGINAL

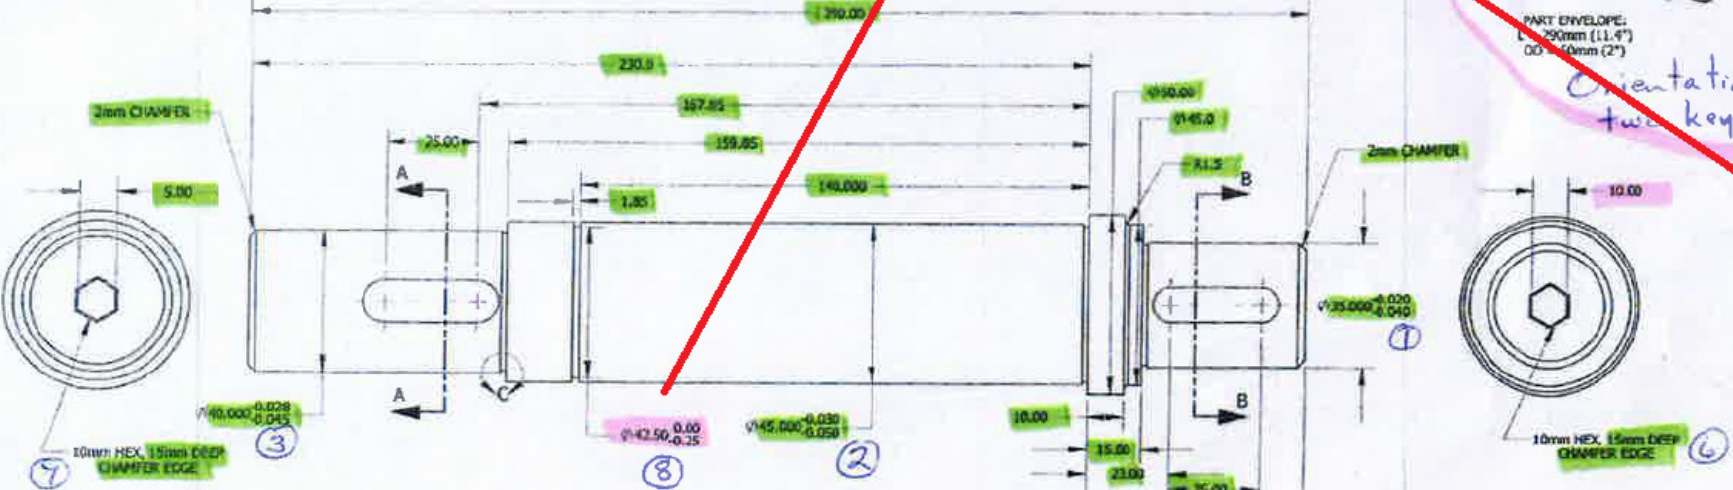


③ $\phi 40.000^{+0.028}_{-0.043}$




② $\phi 45.000^{+0.030}_{-0.050}$



$12.000^{+0.100}_{-0.025}$



$16.000^{+0.100}_{-0.025}$



Handwritten signature and date: 6/10/2016

Signed
 Dated
 Stamped (if you use stamps)

Title Block Items checked and highlighted

Material: 4140 PREHARDENED STEEL
 Coating: ELECTROLESS NICKEL (0.005" THICK)
 Heat treat: -

ELECTROIMPACT Inc. 14130 Cleveland Road, Suite 100, Westland, MI 48186 Tel: (734) 391-6790 Fax: (734) 391-6796	3.19	3.19	3.19	3.19
	EC	EC	EC	EC
DRUG PULLEY 3585	3585	3585	3585	3585
PULLEY DRIVE SHAFT	PULLEY DRIVE SHAFT	PULLEY DRIVE SHAFT	PULLEY DRIVE SHAFT	PULLEY DRIVE SHAFT
3585-16-0215	3585-16-0215	3585-16-0215	3585-16-0215	3585-16-0215

SHAFT TOLERANCES HAVE ACCOUNTED FOR 0.0005" PLATING BUILD-UP